

Specification of
LiTech Power Li-ion 20S14P 72V 58.8Ah Battery Pack
Model No.: LP20S14P160A160AL01



Documents No.	Edition No.	Approved By	Sheets
DSE-A-1214-01	V.0	Eng. MAO (11/06/21)	5

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China
Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tel: +86 769 8203 3052 | Fax: +86 769 82033050
www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

1. General

LP20S14P160A160AL01 is a 20S14P Lithium-Ion rechargeable Battery Pack with Battery Management System integrated, nominal voltage at 72V, rated capacity at 58.8Ah, with IP67 metal casing, implemented with FSP240180C 200A connectors, black as negative and red for positive, charge and discharge from the same terminals, with LCD display, with AT04-2P-PM16 connector for e-switch and with IP65 waterproof metal casing.

- Battery Cell: MOLICEL 21700 P42A
- BMS: BesTech Power HCX-AP21S001

2. Battery Pack basic characteristics

2.1 Capacity	Nominal Capacity: 58.8Ah	
	Minimum Capacity: 56.8Ah	
2.2 Nominal Voltage	72V	
2.3 Internal impedance	≤ 60mΩ	
2.4 Discharge Cut-off Voltage	54.0V	
2.5 Max Charge Cut-off Voltage	84.0V	
2.6 Max. Continuous Charge Current	≤ 29.4A (suggested value for better lifespan, cell is at rated 0.5C charge)	
2.7 Max. Continuous Discharge Current	160A	
2.8 Max. Discharge Peak Current	180A for 1-3 seconds	
2.9 Cycle Life	500 @ 100% DOD 1000 @ 80% DOD 1500 @ 70% DOD	≥ 500 cycles After 500 cycles in 100% DOD charge and discharge at rated current with 25±3°C and within 45%-50% humidity environment, the residual discharge capacity is above 80% of nominal capacity
2.10 Protections	All protections adopted, please check Specs. of the BMS as below	
2.11 Weight	22800g ± 300g	
2.12 Max. Dimension	430 x 297 x 164 mm (L*W*T, actual dimension ≤ max. demension)	
2.13 Operating Temperature (cut off points)	Charge	0°C ~ 45°C
	Discharge	-20°C ~ 75°C
2.14 Storage Temperature (recommend)	Within 1 month	-5°C ~ 35°C
	Within 6 months	0°C ~ 35°C

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tel: +86 769 8203 3052 | Fax: +86 769 82033050

www.LiTechPower.com | info@LiTechPower.com


Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

3. BMS Parameters (see appendix of BMS specifications)

Item	Content	Criterion
1	over charge protection voltage	4.20V ± 25mV
2	over charge recovery voltage	4.10V ± 50mV
3	over charge protection delay time	80ms - 120ms
4	over discharge protection voltage	2.7V ± 50mV
5	over discharge recovery voltage	2.8V ± 100mV
6	max. continuous discharge & Charge current	160A dsicharge & 29.4A charge
7	over current protection current	OCD: 550A-800A
8	over discharge protection delay time	40ms -100ms
9	short-circuit protection delay time	10ms - 20ms
10	static self-consumption current	I < 6.0uA
11	PCB internal resistance	R < 65mΩ
12	passive balancing	50mA ± 15mA @ 4.18V ± 0.025V
13	temperature switch (±3°C) / NTC (B=3435)	Charge: 0~45°C Discharge: -20~75°C
14	E-switch	Yes (controlled by connector of AT04-2P-PM16)

4. Battery Pack Construction

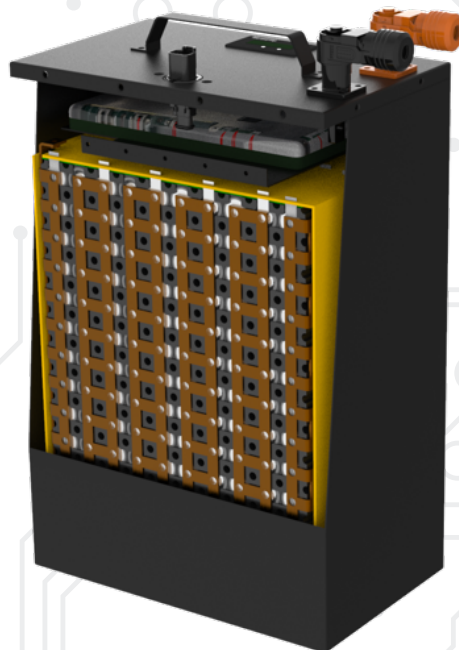

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tel: +86 769 8203 3052 | Fax: +86 769 82033050


www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

4.1 Battery Pack Construction Illustration & Labels

(see appendix of 2D Battery Drawing for wires & connectors definition & pack's detailed dimension)

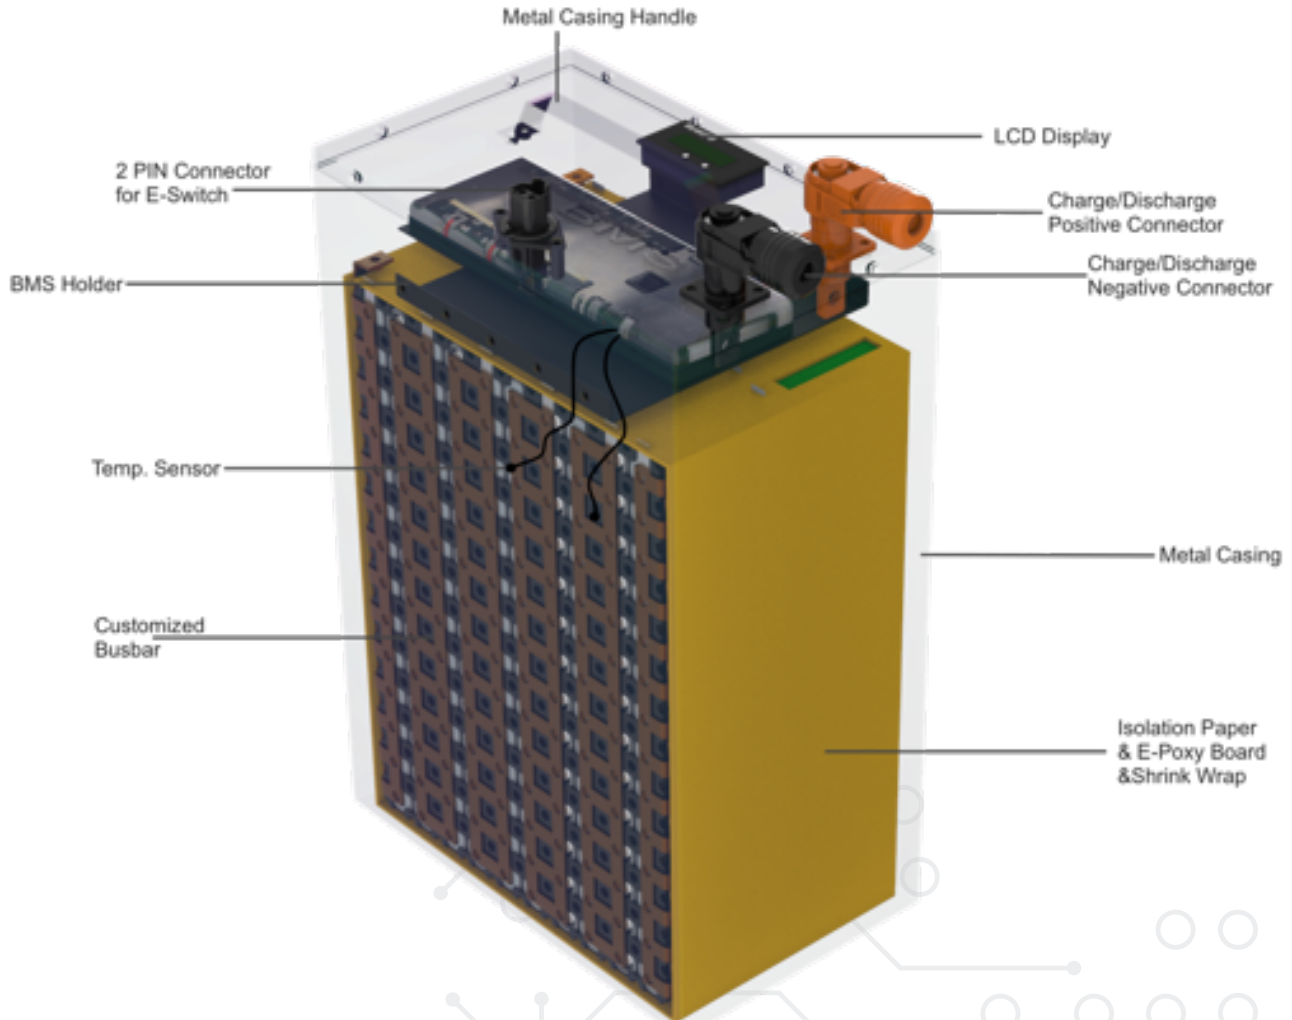

<p>LiTech Power Co., Ltd.</p> <p>Li-ion Battery Pack</p> <p>LiTech POWER</p> <p>MFN P/N.: LP20S6P160A160AL01 Rated Voltage: 72V Rated Capacity: 58.8Ah / 4,233.6Wh Charging Cut-off Voltage: 84V Production Date: 11-06-2021</p> <p>UN38.3 MSDS</p>		<p>⚠ WARNING</p> <ul style="list-style-type: none"> Do not disassemble or puncture the battery, avoid touching the battery connector with hands or metal objects. Do not short circuit the battery, do not connect leads in reverse, do not overcharge or over discharge the battery. Do not store the battery in a high-temperature or high-humidity environment. Keep away from fire and water. Do not cut or squeeze the battery. Charge the battery every two months during storage. Charge the battery with a dedicated charger, otherwise the battery may catch fire or be damaged. Please comply with local regulations when discarding the battery.
--	--	---

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tel: +86 769 8203 3052 | Fax: +86 769 82033050

www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

5. Standard test conditions

Any tests are to be conducted with new batteries that have not been cycled more than five times in one month before the test. Unless otherwise defined, test and measurements done under a temperature of $20 \pm 5^{\circ}\text{C}$ and relative humidity of 45~85%. If it is judged that the test results are not affected by such conditions, the tests may be conducted at Ambient Temperature: $25 \pm 5^{\circ}\text{C}$; Relative Humidity: $65 \pm 20\%$.

5.1 Standard Charge (CCCV):	Constant Current and Constant Voltage (CC/CV) Current = 29.4A End-up Voltage = 84V total / 4.20V (per cell) End Current = 15mA
5.2 Standard Discharge (DC):	Constant Current (CC) Current = 160A End Voltage = 54.0V total / 2.7V (per cell)

6. Transportation

The rated energy of the accumulator is Hazardous / Dangerous Goods for shipping, therefore you need strictly transport them (by road, by railway, by sea and by air) with special handling procedures, restrictions on shipping procedures are always needed. BUT Violent shaking, bumping, rain and flaring sun shall be forbidden during the transportation. Keep the battery less than 30% charged for shipping, according to IATA shipping regulations.

Transport classification:

UN Class: 9 Class | UN number: UN3480



LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tel: +86 769 8203 3052 | Fax: +86 769 82033050

www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.

7. Storage

Please keep the battery in the cool and dry environment: Within 1 month -5°C~35°C or Within 6 months 0°C~35°C, relative humidity ≤75%, please charge the battery pack regularly (every 30-45 days) to keep its chemistry active and longer lifespan.

8. Warranty

All LiTech Power products are covered by a one year limited warranty. The warranty covers premature failure due to defects in materials and / or workmanship. Any breakage caused by accidental damage or as a result of abuse or misuse is not covered. The warranty is limited to the original purchaser and is not transferable.

The warranty is void if the warranty sticker or soak-water-sticker is removed from the product or if the battery has been modified in any way. Please charge your battery directly after each use. Leaving your battery in discharged state will seriously and permanently damage its performance. Please note we cannot uphold warranty claims in these circumstances. Your battery will degrade over time and with use, such degradation is not covered by warranty.

9. Notice

The information in this specification subject to change without prior notice. The information contained in this document is for reference only and should not be used as a basis for product guarantee or warranty. For applications other than those described here, please consult LiTech Power directly.

10. Caution

- * Please read the specification carefully before testing or using the battery, as improper handling of Lithium-ion battery may result in loss of efficiency, heating ignition, electrolyte leakage or even explosion.
- * While testing the battery of charging and discharging, please use the testing equipment special for Li-ion battery. Do NOT use the ordinary source of constant current and constant voltage, which fails to restrict charge and discharge to battery in order to prevent the battery from being overcharged and over-discharged, triggering battery malfunction or explosion.
- * When charging and discharging the battery or packing it into the equipment, do NOT reverse the terminals of cathode and anode or it will make the battery overcharging and over-discharging, causing the battery to lose efficiency seriously and even explode.
- * Do NOT weld the battery directly, do not disassembly the battery.
- * Do NOT put the battery together with metal products such as necklace, hairpin, coin or screw in the pocket or in the bag; neither store them together. Do NOT connect the positive and negative electrode directly with such conductive materials as metal, or it may make the battery short-circuit.
- * Do NOT beat, throw or trample the battery. Do NOT put the battery into the washing machine or the high-pressure container.
- * Do NOT put the battery close to heat source, for instance, fire, heater etc. Do NOT use the battery under the circumstance of burning sun or the temperature exceeding 60°C, or it may cause the battery to generate heat, heating ignition and loss of efficiency.
- * Do NOT get the battery wet or throw the battery into water. When not use, it should be placed in the dry and low temperature environment.
- * While using, testing or preserving the battery, if you find the battery become hot, distribute smell, change color, deform or any other abnormality, please stop using or testing immediately, and attempt to isolate and keep away from the battery.
- * If the battery leaks, the electrolyte gets into the eyes, do not rub eyes, instead, rinse the eyes with plenty of water, and seek medical service. If the electrolyte gets onto the skin or clothes, wash it with plenty of water immediately.

LiTech Power Co., Ltd

Factory Dongguan: 4F, Bldg B, RuiXin HengYe Industrial Park, TaiXing Rd # 18A, ShiGu District, TangXia Town, DongGuan, China

Factory Shenzhen: 3F, Bldg 3, Fulian Industrial Park, Heping Industrial area, Jianhui Rd, Longhua, ShenZhen, China

Tel: +86 769 8203 3052 | Fax: +86 769 82033050

www.LiTechPower.com | info@LiTechPower.com

Specifications and data are subject to change without notice. Contact LiTech Power for latest information.

Copyright © LiTech Power Co.,Ltd. All Rights Reserved.